

SPECIFICATIONS:

Manually Operated Hydraulic Spool Valve.
Three Way, Directional Control or Selector Valve.
Maximum System Pressure: Ports
1, 2, and 3) is 3,000 PSIG. See "SHIFT FORCE NOTES"

Fluid temperature -40°F (-40°C) to 200°F (93.3°C)

Install Cartridge Valve using No. 471 Spanner Tool.
Valve should screw in freely to the Mount Seal.
Final tightening to 15 foot pounds torque.
Use lubricant on external oil seals and mounting
threads.

OPTIONS

Hand Button Operator Shown.
Valve is available with Direct Plunger operator.

Standard seals are Buna-N with Teflon back up rings.
Optional seals include Viton, Teflon and others.

Keys 7 & 20 are vents to atmosphere.
T Option provides 10-32 Threaded ports at these
locations. Key 6 Filter is not used with T Option.

TOOLING


- 1/8 (3.175) Pin Spanner Tool
Order No. 471, Ref. Key No. 20
- 3/16 (4.763) Face Spanner Tool
Order No. 482, Ref. Key No. 13

SHIFT FORCE NOTES:

10 to 15 Pounds of Force is
required to shift the valve
spool with zero pressure on
port no. 1.

Any pressure on Port No. 1
will increase Force Requirement
by .012 X Port No. 1 PSI.

CARTRIDGE VALVE

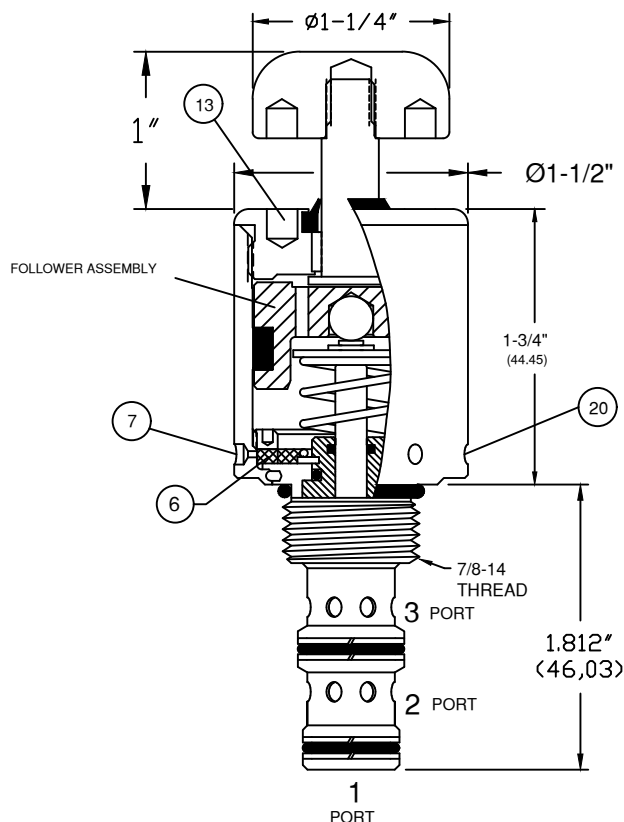

Cavity & Housing

Cavity & Tooling C-8543 (10-3):
See Spec. Sheet 1200634

Line Mount Housings:
See Spec. Sheet 1200673 & 1201903


Panel Mount Housings & Spacers:
See Spec. Sheets
1202983 and 1202990

Cavity, Tooling & Housing Info
found at www.doering.com
Cavities, Housings & Manifolds.

Doering Company also manufactures
multi function and multi station
Housings & Manifolds.

Please call for assistance.

PRESSURE DROP CHART

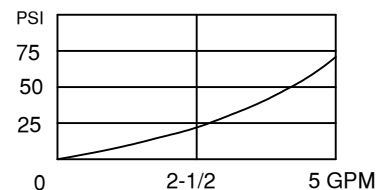

3PS SERIES

3 Way Spool Valve, Manually Operated.
Directional Control or Selector Valve.


Cartridge Valve
Order Number

54237MOK5

Suggested Connections


3 Way, Normally Closed
1 to TANK
2 to CYLINDER
3 to PRESSURE

Functional Symbol




54237MOK6

3 Way, Normally Open
1 to TANK
2 to PRESSURE
3 to CYLINDER



54237MOK0

3 Way, Normally Open
1 to CYLINDER
2 to PRESSURE
3 to TANK



DOERING

6343 RIVER ROAD SE ■ CLEAR LAKE, MN 55319 USA
Telephone: 320-743-2276 ■ Fax: 320-743-3723
mailto:mailbox@doering.com ■ www.doering.com